

Product news

FW-7530

Compact desktop network appliance with Intel ATOM processor and six network ports

- Slim 36mm height
- Internal 2.5" HDD support
- Passive cooled fanless design
- Onboard Intel ATOM N270 1.6GHz CPU
- Intel 945GSE + ICH7R chipset
- Windows (2000, 2003, XP), Linux support
- 6 LAN ports, 1 pair with bypass support
- Gigabit Ethernet
- Console Port, 2 USB 2.0 Ports



Form Factor

Small form factor for flexible deployment
The FW-7530's low profile (36 mm height) makes it a perfect solution for network applications where space is critical.

Cooling

Passive Heatsink

Platform

Fanless, low power platform
The ultra-low voltage ATOM processor allows for completely fanless chassis design, which results in reduced power and cooling requirements.

Environmental Parameters

Temperature, ambient operating: 0C ~40C
Temperature, ambient storage: neg 20C~70C
Humidity (RH), ambient operating and nonoperating 5 ~ 95%, non condensing

HDD

HDD Bay(s) 2.5" x 1

Approvals & Compliance

CE Emission
FCC Class A
RoHS

Ports

6 GbE Ethernet Ports
Intel 82574L LAN x 4, Intel 82541PI x 2 Controller 1 pair with by-Pass support

Physical Data

190 x 36 x 145mm
Weight: 1.2 kg (without HDD)

I/O Interface

Console: RJ45 x 1
USB 2.0: 2
IPMI via OPMA slot: Optional
Expansion: PCI-E PCI-E (x8) x1 or PCI-E (x4) x2 (Optional)

Power

Type : power adapter – 60W
Input: 12DC

Expansive I/O interface and Internal Storage

An internal 2.5" HDD, CF Socket, USB 2.0 ports, Mini-PCI and console connection options guarantee that all hardware requirements will be met. Six GbE network ports including one pair with bypass provide high throughput and availability.

Miscellaneous

Watchdog timer
Internal RTC with Li Battery

For price information please contact our sales team. Mail to: sales@landitec.com

Product news

19"-cover panel from plastics to face free space in a 19"-rack




- air separation function: cost-saving and very effective possibility to reduce energy costs in data centres (BITKOM guideline "energy efficiency in data centers")
- optical upgrading due to facing the free 19"-spaces
- attractive design owing to chamfered cover front
- little assembly time due to Quick-Clip-System: simply clip-on of the cover panel into the 19" level without any tools
- the cover may be removed wearless and without tools at any time to re-use again
- protection against dust
- fire protection classification acc. to UL94 V-0
- reduction of weight compared to conventional metal covers



For price information please contact our sales team. Mail to: sales@landitec.com

Landitec Service


Smart Customers use our knowledge in appliance handling.

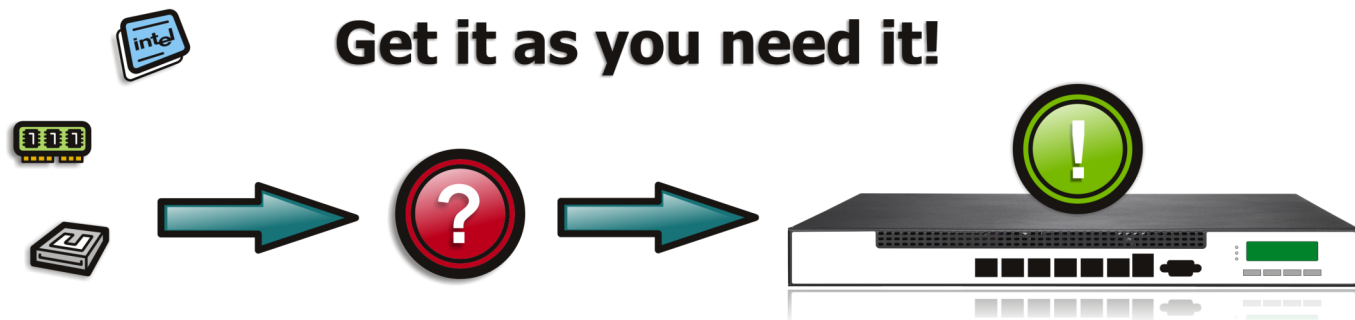

Use our Knowledge to assemble your Appliance

The Landitec Distribution helps you selecting Appliances and the related correct components. Use our technical know-how, in order to adapt your optimum Appliance.

Realize your desire.

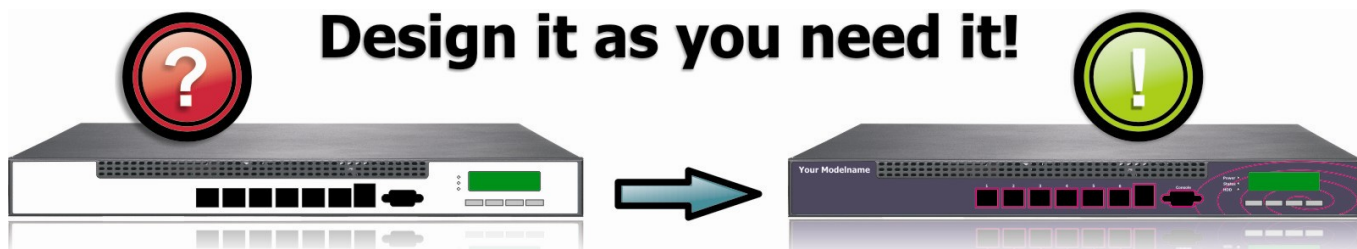

Use our Knowledge to design your Appliance

Landitec can assist you designing your own branded appliance. Everything is possible. We realize your design proposal or a complete new arrangement. A free example of your own created front lable can help to make the right decision.

Please feel free to contact us for more information about our products and our services.

For price information please contact our sales team. Mail to: sales@landitec.com